PT Yongjin Javasuka Garment

(Factory II)


STANDARD OPERATING PROCEDURE (SOP) FOR BONDING STRENGTH TESTER MACHINE

(UP DATED FEBRUARY 01 '2016)

WORKING MANUAL	Section: LABORATORY	Process: Bonding Tester

PROCEDURES

Prepare 2 kind of bonding mock up as per recommended Application by supplier and seam must be Free Puckering, Pleats, waving or roping

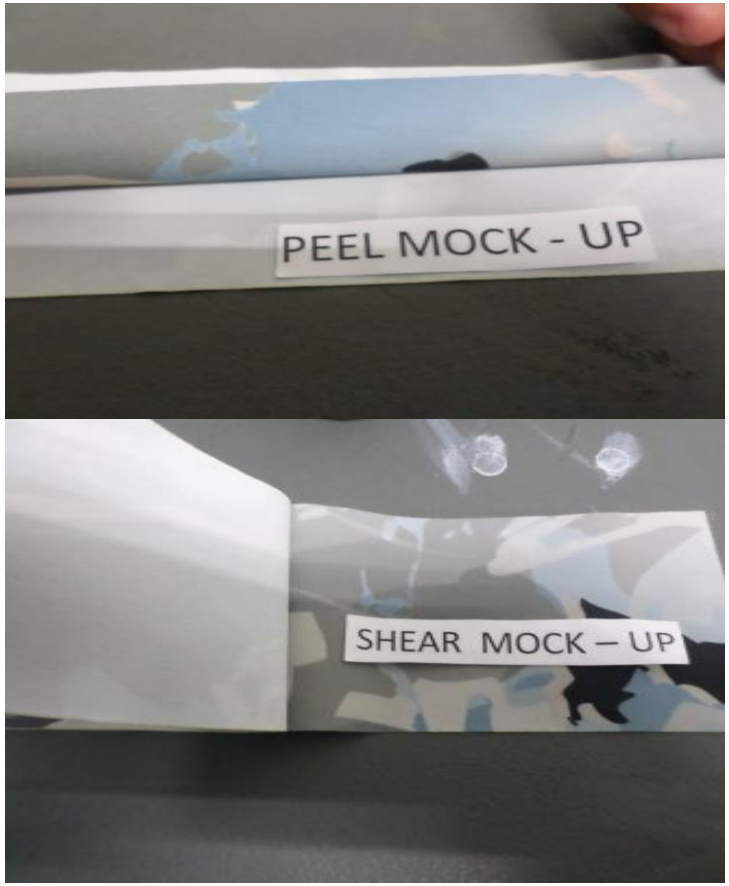

Buat 2 macam bonding mock –up (Peel Mock-up dan Shear Mock-up) sesuai dengan recomendasi bonding supplier dan Mock-up tidak boleh kerut, ngelipat

Select Machine Switch **“ON”**




Hidupkan mesin dengan menekan tombol **“ON”**

WORKING MANUAL	Section: LABORATORY	Process: Bonding Tester

PROCEDURES

Put each of bonding mock-up in Machine Grips and each mock up different stretching process.
Peel Bonding Mock-up
"Vertical Strength"
Shear Bonding Mock -up
"Horizontal Strength"

Select switch " RESET" to made zero on monitor display before start stretching Process

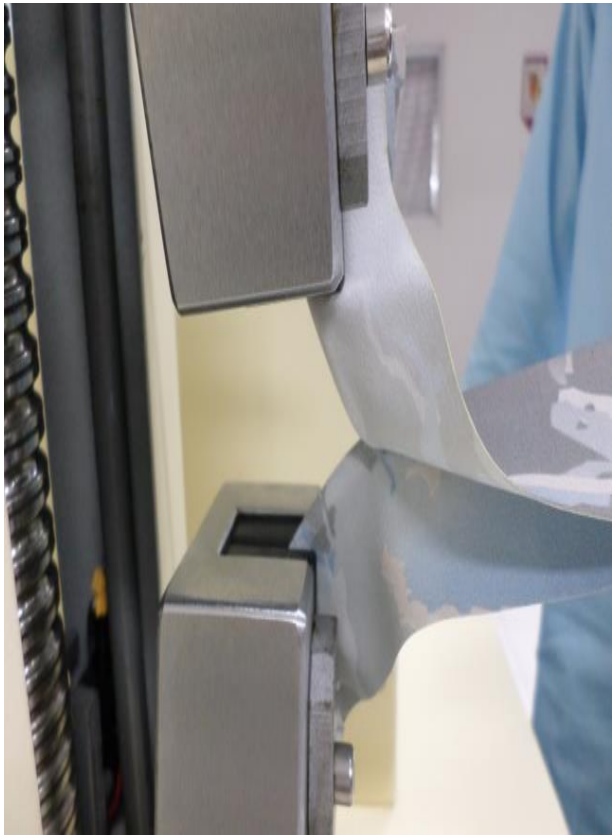

Pasang Mock-up di Grip sesuai dengan Jenis mock –up
Peel Mock-up (Bonding di tarik vertical)
Shear Mock-up (Bonding di tarik horizontal



Untuk memulai proses penarikan bonding tekan tombol **"RESET"** untuk memastikan di layar display angka **" 0.00"**

WORKING MANUAL	Section: LABORATORY	Process: Bonding Tester

PROCEDURES

Selected Switch " UP/PULL" to star Stretching process and made sure Speed controller was set up as per Buyer standard . : **50 mtr / menit**

Start process **"Shear bonding strength "** test and check result on the monitor Display .
Shear Strength Standard . :
133.344N = 13.59 kg



Tekan tombol " UP/PULL " untuk memulai Proses penarikan bonding mock-up. putar Speed Controller tombol untuk mengatur kecepatan tarikan mesin



Lakukan proses penarikan dan lihat tampilan di display monitor untuk proses penarikan maximum **"Shear bonding mock-up"**
Standard Shear Strength. :133.344N=13.59 kg

WORKING MANUAL	Section: LABORATORY	Process: Bonding Tester

PROCEDURES

Start process **"Peel bonding strength "** test and check result on the monitor Display .
Shear Strength Standard . :
133.344N = 1.360 kg

After finished process bonding strength test, Press switch **"OFF"** or selected **"EMERGENCY"** to turn off a machine



Lakukan proses penarikan dan lihat hasil Nya display monitor dari proses penarikan Maximum **"Peel bonding mock-up "**
Standard Peel Strength :13.344N=1.360 kg



Setelah selesai proses Bonding strength test Matikan mesin dan tekan tombol **"Emergency"** Atau tekan tombol **" ON/OFF"**